



HLEMU

C1D2 Emergency Unit


Typical Applications

Oil Refineries
Steel Foundries
Plants
Mills
Granaries

Emergency Lighting for C1D2 Environments

The HLEMU from HoloPhane® is a high-performing, IP66 rated emergency unit that is designed for use in Class 1, Div 2 groups A, B, C, & D hazardous environments, meeting up to a T3C temperature rating. It is designed with a one-piece corrosion-resistant enclosure that is high-impact resistant to protect fixture against elements, including dust, dirt, and water.

- + Small, adjustable LED lamp heads for optimal spacing.
- + Versatile mounting for quick and easy installation including wall mount and pendant mount. Pre-installed conduit hub for easy wiring entry
- + Standard Self-Diagnostic ensures reliable operation and code compliance, while saving time and labor by running tests automatically every 30 days, 180 days, and once a year. Manual test button included

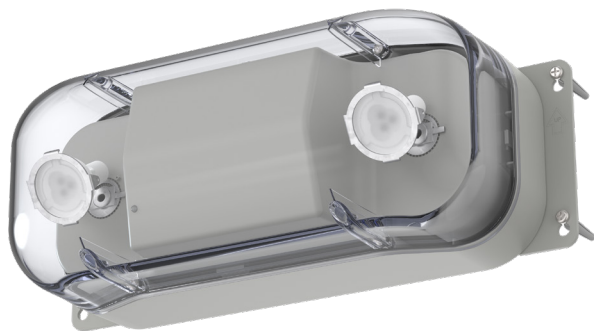

Scan to See HLEMU Spec Sheet



Warranty Five-year limited warranty. Full warranty terms located at <https://www.acuitybrands.com/support/warranty>

Product specifications may change without notice. Please contact your sales representative for the latest product information.